


ATTACH BEAMS SECURELY TO RIGID SUPPORT STRUCTURE

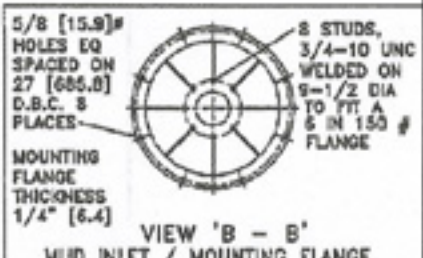

OPTIONAL RING, RESILIENT ISOLATION PART NUMBER 12110 FOR BOTTOM MOUNT

WELD 1/4" - 3/8" [6.5 - 10 MM] ROUND BAR OVER THE MUD INLET AS SHOWN TO EXCLUDE OBJECTS MAY ALSO USE 1/4" X 1/2" [6 X 14 MM] FLAT BAR

- NOTES**
- MUD TANK, PADS, STUDS, SUPPORTS AND PIPE TO BE SUPPLIED BY OTHERS. SHOWN BY PHANTOM LINES.
 - SLOPE OF MUD DISCHARGE LINE = 1 IN. DROP PER 4 FT. RUN = 21 MM DROP PER 1 M. RUN



MUD DISCHARGE
6", 150 # RAISED FACE
8 HOLES FOR 3/4" [M20]
FASTENERS ON 9-1/2" [241.3]
DIA BOLT CIRCLE

REV.	DATE	DESCRIPTION	BY	CHKD.
A	13 JUN 13	ADD VALVES, SWITCH, LUG ECR 1305		GDM
BURGESS MANUFACTURING, LTD.				IS NOT SOLE OWNER
<small>THE DESIGN, METHOD OF CONSTRUCTION OR WORKMANSHIP SUBJECT MATTER, DESCRIBED BY THE PROPRIETARY AND CONFIDENTIAL INFORMATION OF BURGESS MANUFACTURING, LTD. IT IS LOANED IN CONFIDENCE WITH THE UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, USED OR DISCLOSED FOR ANY PURPOSE EXCEPT THE LIMITED PURPOSES FOR WHICH IT IS LOANED. THIS DOCUMENT SHALL BE RETURNED TO BURGESS MANUFACTURING, LTD. UPON DEMAND.</small>				
TITLE		INSTALLATION MODEL 1000 CE		
DRWN BY	DATE	APP'D.	REV. NO.	
GDM	17 OCT 05		11890	